**NOTES:**

Ethernet to serial converter for serial tunneling via the TCP/IP network.
The BinVentory Controller software has the ability to communicate with multiple remote TCP/IP/serial devices. These devices are used to extend the range of a Sensor serial network over an IP-based local area network.

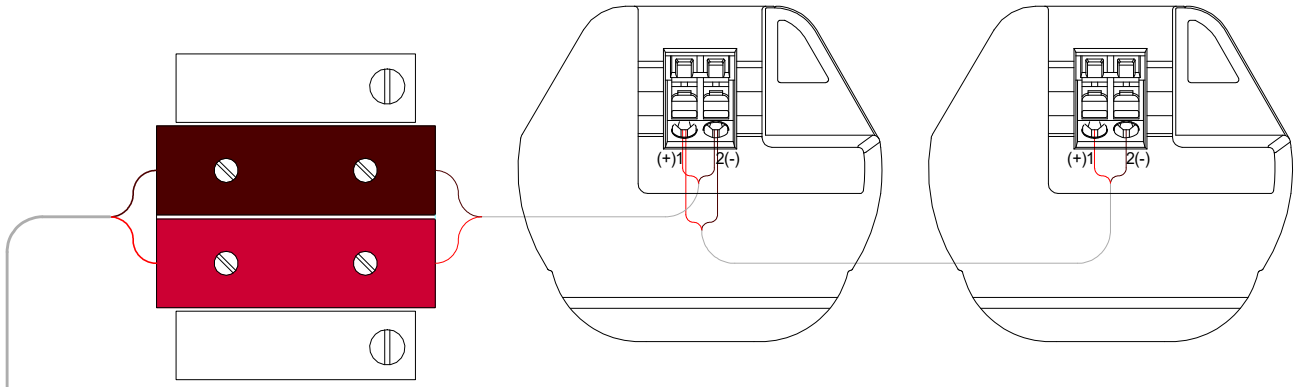


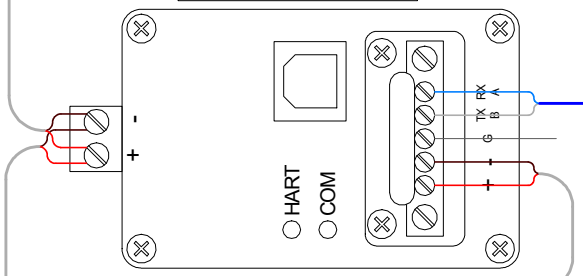


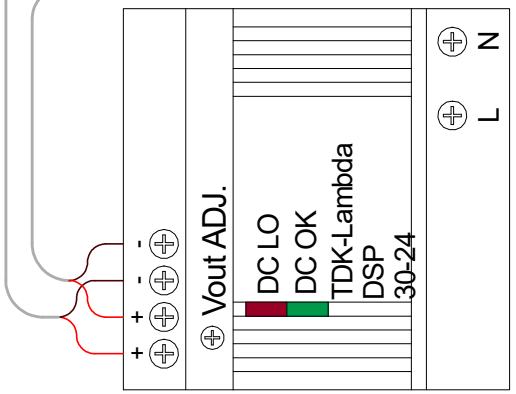


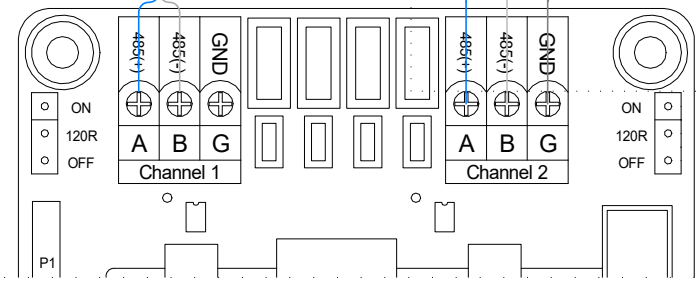





***RS-485 connection terminal on C-50***


7201 N 98th St.
Lincoln, NE 68507
info@binmaster.com (402) 434-9102


SITE/CLIENT:

TITLE:
HART-HCM-CHIYU practice system diagram

JOB NO:

DRAWN BY: CEF

DATE: